


Type-20

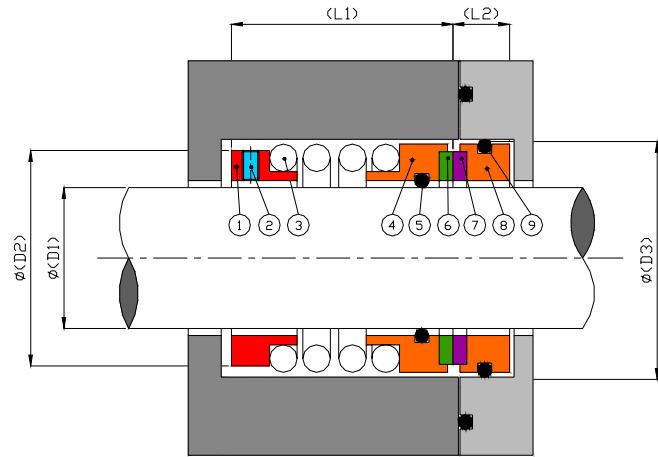

Design Features

- Unbalanced
- Single Coil Spring
- Setting-length of spring can be held in position by built-in set-ring and set-screws

Operating Conditions

- Max. Operating Pressure : 30 kg/cm² *
- Temperature Range : -20 to 200 °C *
- Max. Rubbing Speed : 20 m/s

* (Depend on combination of materials)

Standard Materials

Metal Parts	: 316 SS
Springs	: 316 SS
Rotary Face	: Silicon Carbide
Stationary Face	: Silicon Carbide
Secondary Seal	: Fluorocarbon rubber

* Other configuration of materials also available on request

Seal Size (D1)	D2	D3	L1	L2
20	30.0	34	30.0	11
22	31.6	35	32.0	11
24	34.7	35	35.0	11
25	34.7	35	35.0	12
28	40.0	43	37.5	12
30	41.0	45	37.5	12
32	44.0	48	39.0	12
35	48.0	50	40.0	12
38	52.0	54	42.0	12
40	54.0	58	45.0	12
43	56.0	59	46.0	12
45	57.0	60	46.0	12
48	62.0	66	48.0	12
50	63.5	65	49.0	12
55	69.8	73	56.0	12
60	75.0	80	56.0	12
65	81.5	85	64.0	13

* Inch size is available upon request.