


Type-30

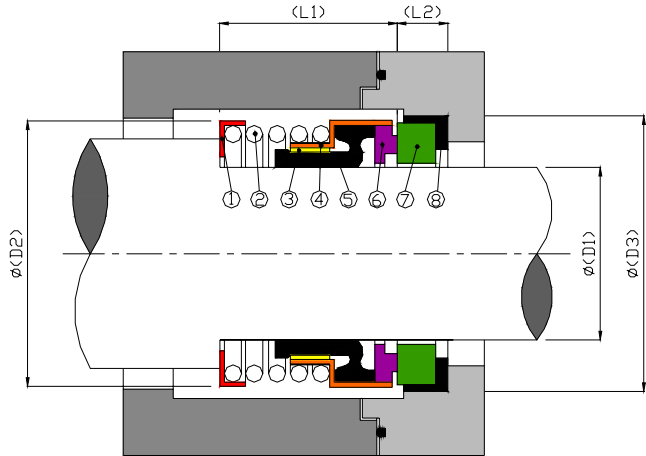

Design Features

- Unbalanced
- Single Coil Spring
- Rubber-bellows is designed incorporates in several functions, as seal face carrier, secondary sealing element, and drive collar
- Independent of direction of rotation

Operating Conditions

- Max. Pressure : 15 Kg / cm²
- Temperature Range : -56 to 100 °c
- Max. Rubbing Speed : 20 m/sec

* (Depend on combination of materials)

Standard Materials

- Metal Parts : 316 SS
- Spring : 316 SS
- Rotary Face : Carbon
- Stationary Face : Ceramic
- Secondary Seal : Nitrile-butadiene Rubber

* Other configuration of materials also available on request

Seal Size (D1)	D2	D3	L1	L2
14	27.0	28	18.5	6.5
15	27.0	28	18.5	6.5
16	27.0	32	20.0	7.0
20	31.5	38	20.0	8.0
22	33.5	40	19.5	8.5
25	43.0	44	20.5	8.5
28	46.0	46	21.5	8.5
30	49.1	50	22.0	9.0
32	49.1	54	24.0	9.0
35	52.3	58	25.5	10.5
38	55.5	60	26.5	10.5
40	63.5	64	27.0	11.0
45	66.6	66	29.0	11.0
50	73.0	72	31.0	11.0

* Inch size is available upon request.