


Type-35

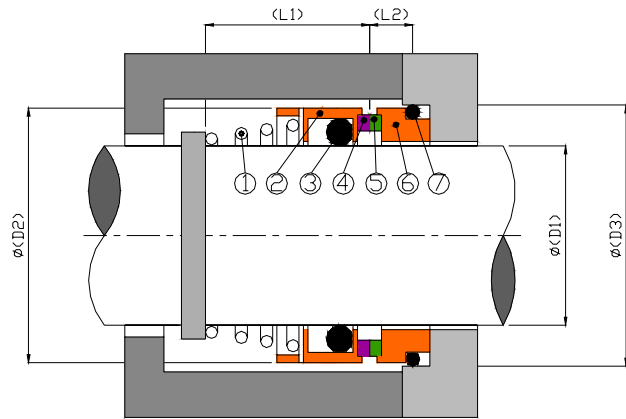

Design Features

- Unbalanced
- Conical Coil Spring
- Shrink-fitted seal faces can be easily replaced with other materials

Operating Conditions

- Max. Pressure : 10 Kg / cm²
- Temperature Range : -30 to 205 °c
- Max. Rubbing Speed : 10 m/sec

* (Depend on combination of materials)

Standard Materials

- Metal Parts : 316 SS
- Spring : 316 SS
- Rotary Face : Carbon
- Stationary Face : Tungsten Carbide
- Secondary Seal : Fluorocarbon rubber

* Other configuration of materials also available on request

Seal Size (D1)	D1	D2	D3	L1	L2
20	20	31	35	22	10
22	22	33	35	22	10
24	24	35	38	23.5	10
25	25	36	38	26.5	10
28	28	41	42	26.5	11
30	30	43	45	26.5	11
32	32	46	48	28.5	11
35	35	49	52	28.5	11.5
38	38	53	55	33.5	11.5
40	40	56	58	36.5	11.5
43	43	59	61	38.5	13.5
45	45	61	64	39.5	14.5
48	48	64	66	45	14.5
50	50	66	69	45	14.5
53	53	71	75.4	47	15.5
55	55	71	75.4	49	15.5
58	58	76	78.4	55	15.5
60	60	78	80.4	55	15.5
65	65	84	85.4	55	15.5
68	68	88	91.5	55	18.0
70	70	90	92	57	18.0
75	75	98	99	62	18.0
80	80	100	104	62	18.0

* Inch size is available upon request.