


Type-70

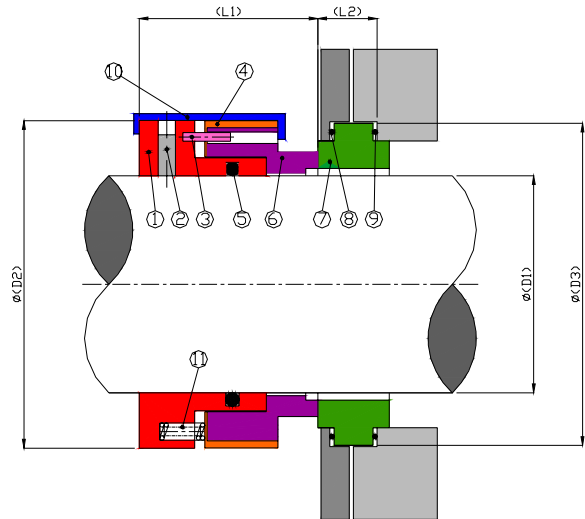

Design Features

- Balanced
- Outside Installation
- Multiple-spring exert even closing force on the seal faces
- Set-ring is provided for suitable operating length of rotary seal setting- length

Operating Conditions

- Max. Pressure : 12 Kg / cm²
- Temperature Range : -30 to 205 °c
- Max. Rubbing Speed : 25 m/sec
- * (Depend on combination of materials)

Standard Materials

- Metal Parts : 316 SS
- Springs : 316 SS
- Rotary Face : Carbon
- Stationary Face : Tungsten Carbide
- Secondary Seal : Fluorocarbon rubber

* Other configuration of materials also available on request

Seal Size (D1)	D2	D3	L1	L2
20	46	44.7	31	17.4
22	48	47.4	31	17.4
24	50	52.2	35	17.4
25	51	53.4	35	17.4
28	54	56.6	35	17.4
30	56	58.2	35	17.4
32	58	59.3	35	17.4
35	61	61.2	35	17.4
38	64	69.2	35	17.4
40	66	72.4	36	17.4
45	71	82.0	36	17.4
50	76	88.2	36	17.4
55	81	97.8	36	17.4
60	86	98.7	36	17.4
65	91	107.2	36	17.4

* Inch size is available upon request.